

1/5

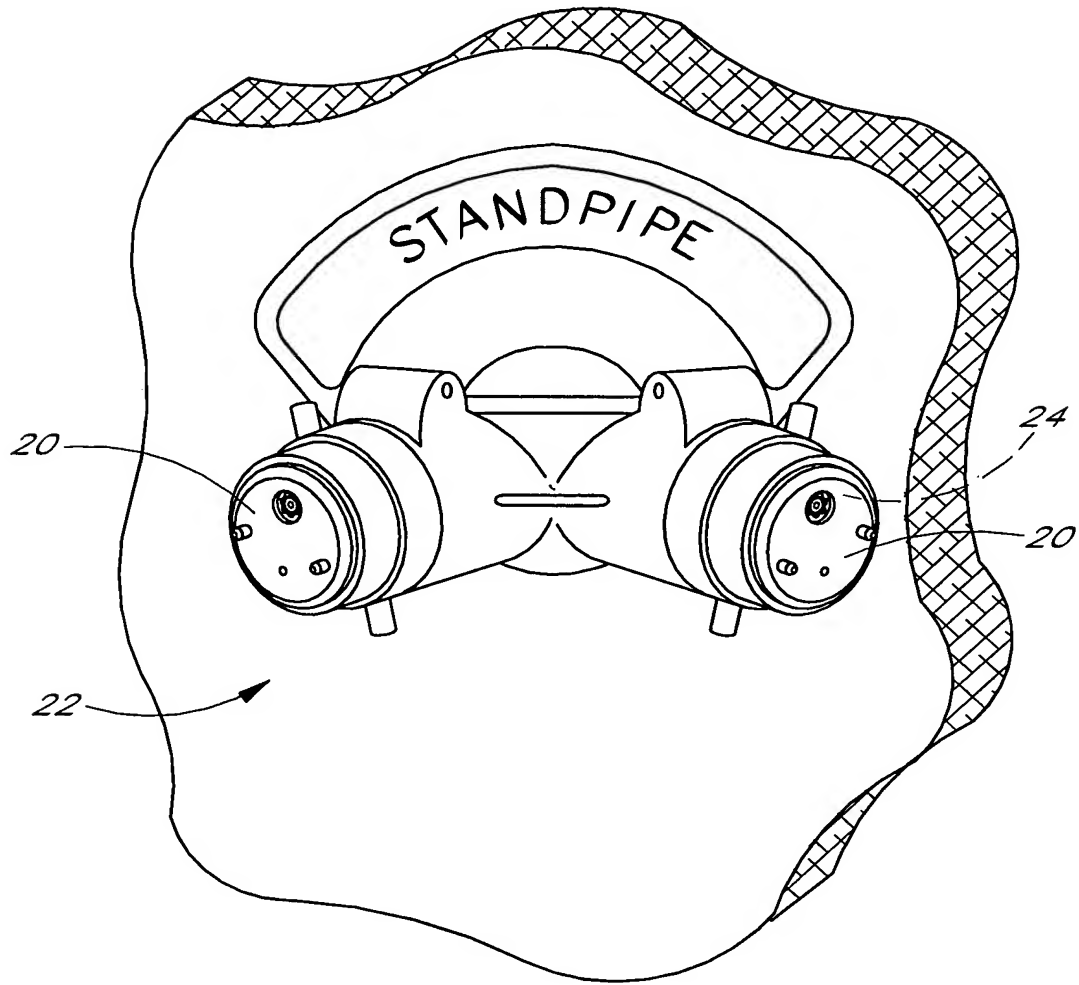


FIG. 1




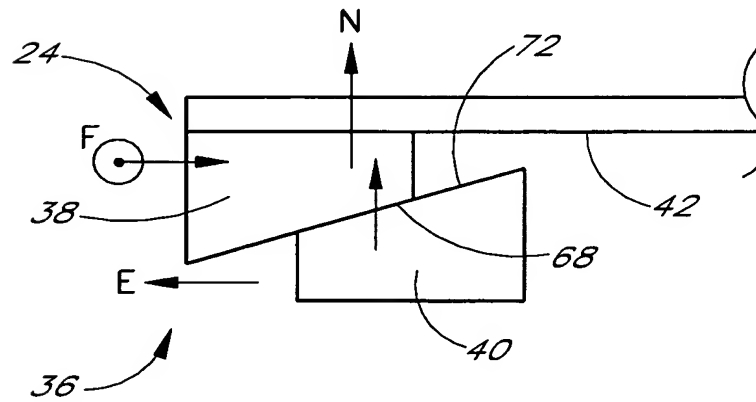


FIG. 2

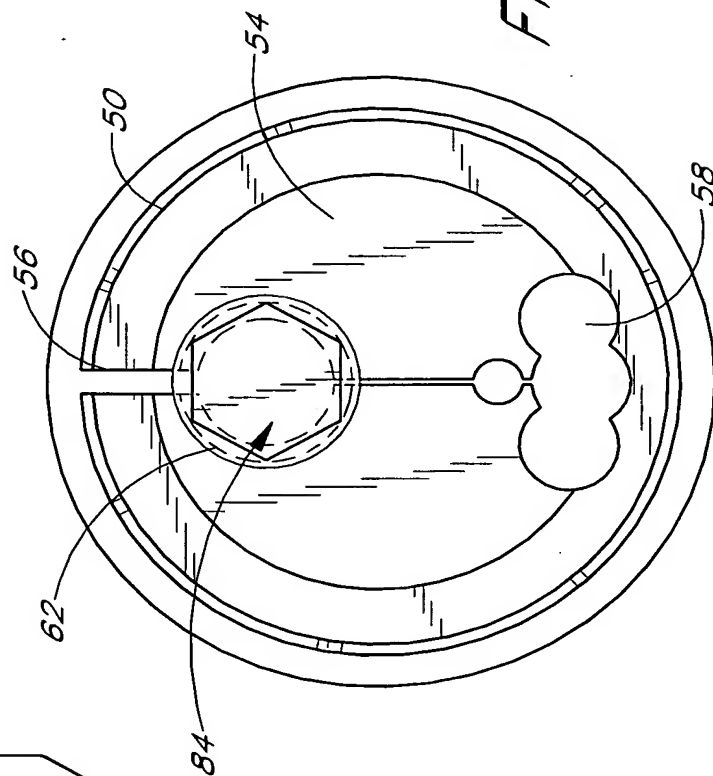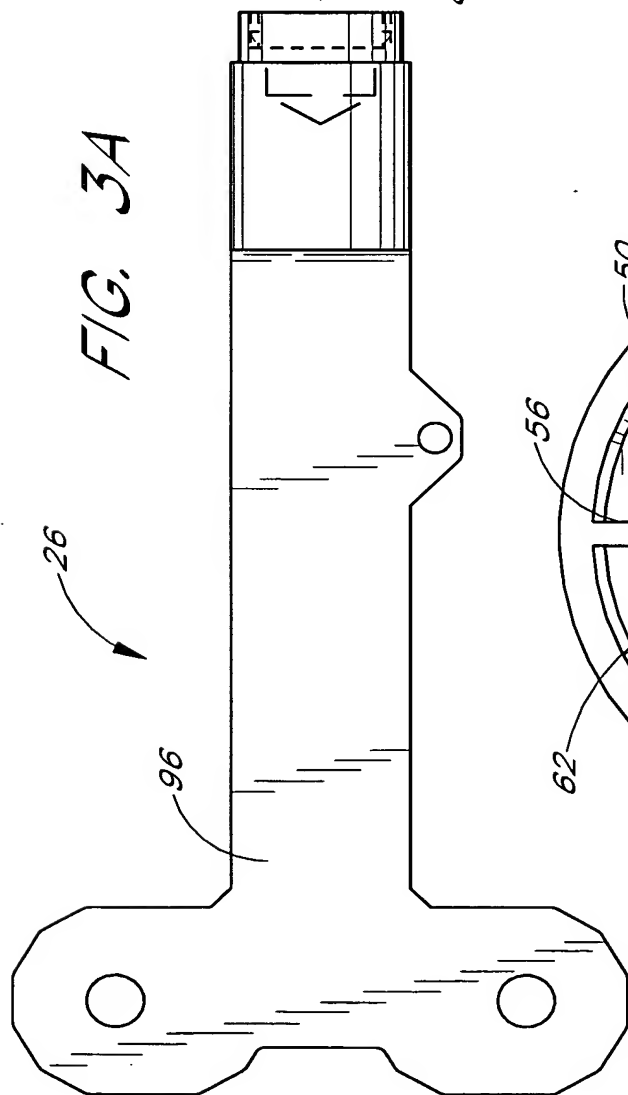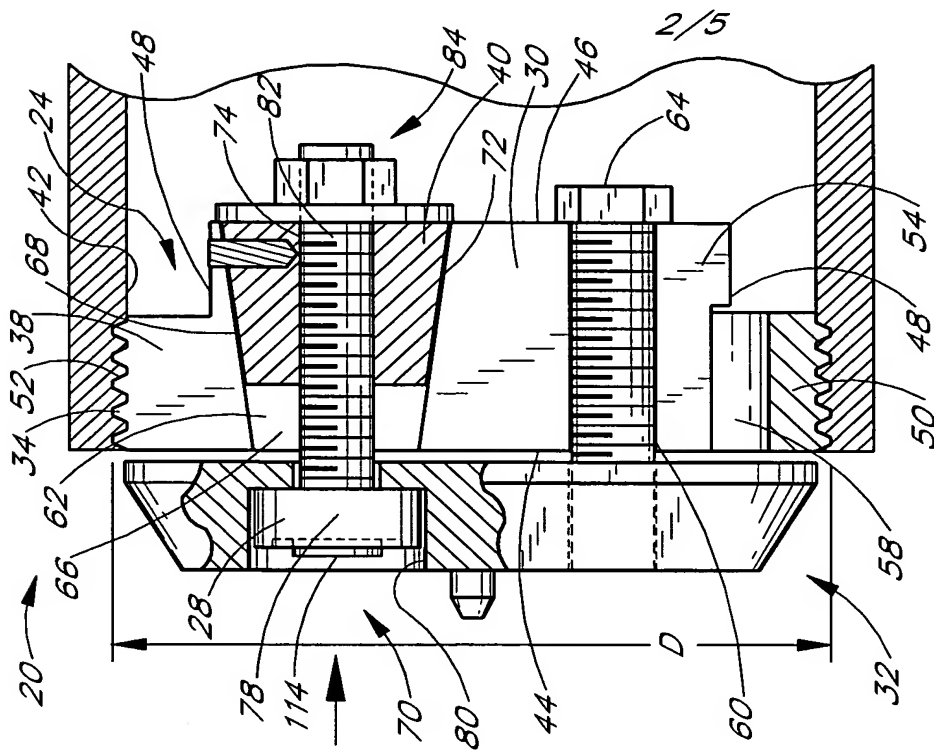

*Dohn J. Trempala*

*Atty. Docket: KNOXX.024C2*

This exploded perspective view illustrates the assembly of a mechanical device. The components are arranged along a central horizontal axis, indicated by a dashed line. At the top, a bracket labeled 84 groups three parts: a small rectangular block 76, a thin rectangular plate 74, and a larger rectangular block 85. Below these is a component 40, which is a rectangular block with a curved top surface. To the right of component 40 is a long, thin rectangular strip 64. In the center, a large cylindrical component 30 is shown in cross-section. It features a central bore 44 and a series of longitudinal slots 46. A bracket labeled 48 groups the right side of this component, including a flange 50 and a series of longitudinal slots 54. To the left of component 30 is a component 32, which is a rectangular block with a series of longitudinal slots 88. Below component 32 is a component 80, which is a rectangular block with a series of longitudinal slots 86. To the right of component 30 is a component 60, which is a rectangular block with a series of longitudinal slots 90. Below component 60 is a component 94, which is a rectangular block with a series of longitudinal slots 98. At the bottom, a component 78 is shown, which is a rectangular block with a series of longitudinal slots 114. A component 82 is also shown, which is a rectangular block with a series of longitudinal slots 28.

FIG. 4

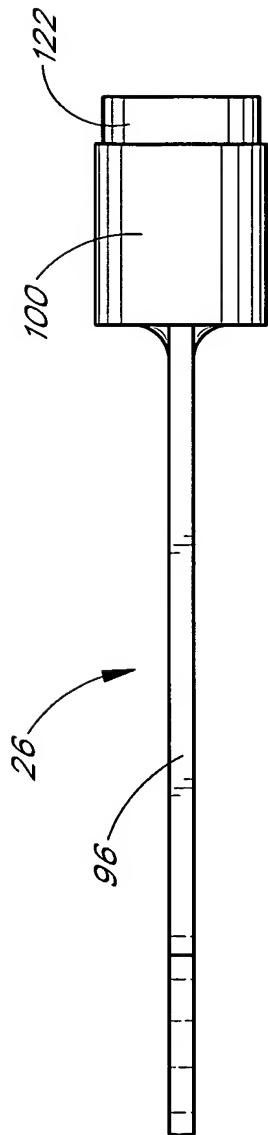


FIG. 5

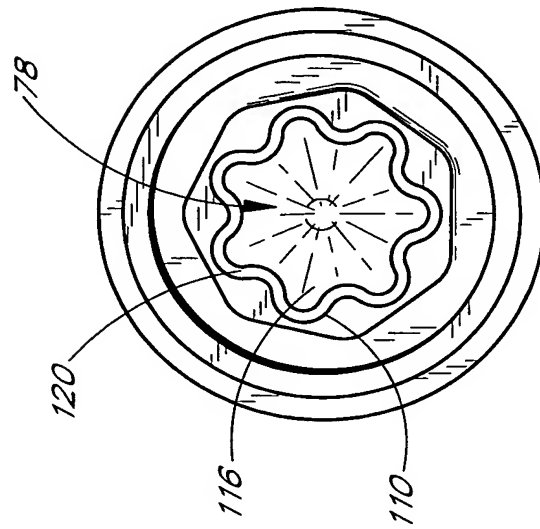


FIG. 7

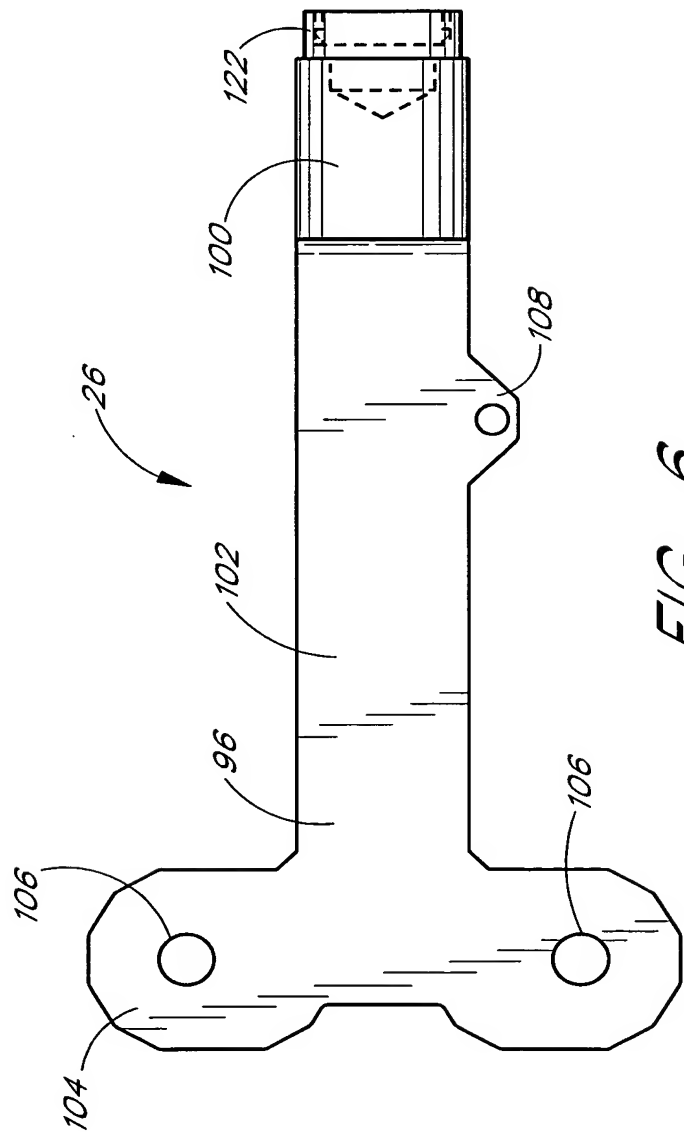


FIG. 6

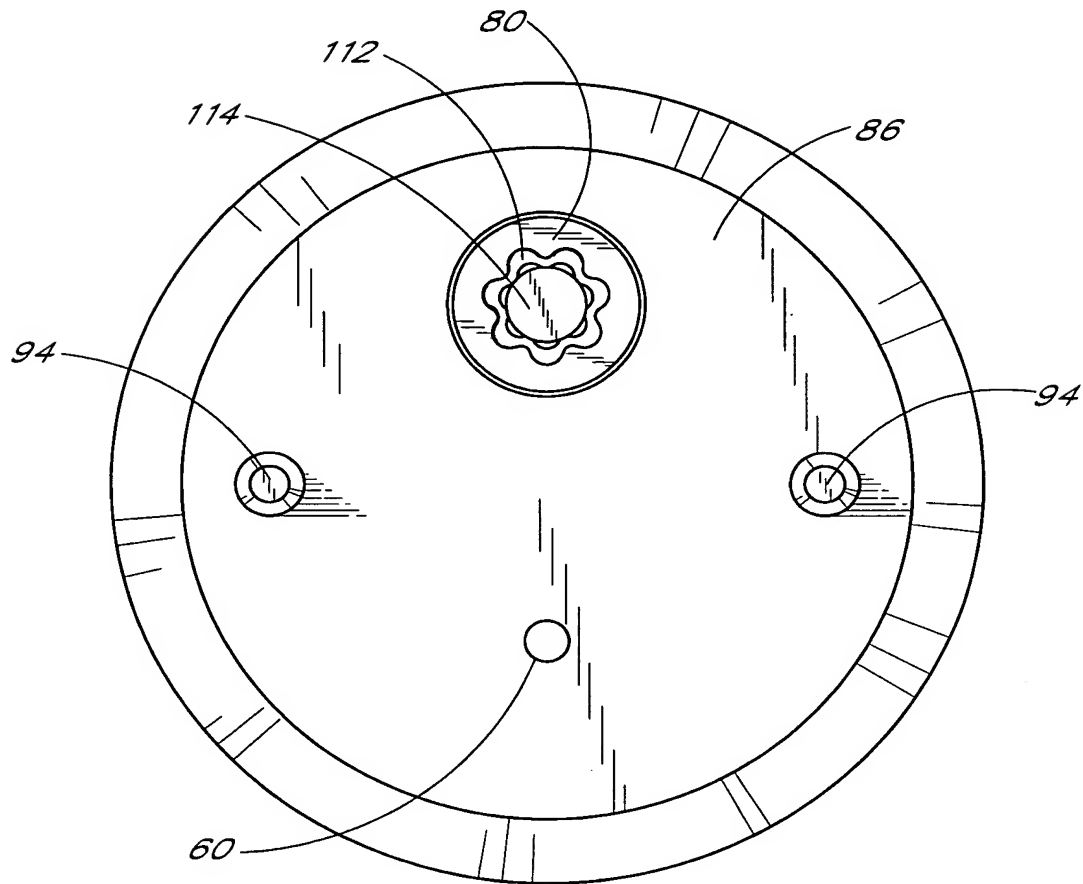


FIG. 8